

Vol. 17

No 3

2011



JOURNAL OF THE BALKAN TRIBOLOGICAL ASSOCIATION

Editorial Board

Honorary and Founding Editor

Prof. Dr. Nyagol Manolov, Bulgaria

Editor-in-Chief

Prof. Dr. Slavi Ivanov, Bulgaria

Editor

Assoc. Prof. Dr. Zh. Kalitchin, Bulgaria

Associate Editors

Prof. Dr. Nicolae Napoleon Antonescu,
Romania

Prof. Dr. Eng. habil. K.-D. Bouzakis,
Greece

Prof. Dr. Branko Ivković, Serbia

Prof. Dr. Mehmet Karamis, Turkey

Assoc. Prof. Dr. Mara Kandeve,
Bulgaria

Assoc. Prof. Dr. V. Gecevska,
FYR Macedonia

International Editorial Board

Prof. Dr. Vassil Alexandrov, Bulgaria

Prof. Dr. Vladimir Andonovic, FYR
Macedonia

Prof. Dr. Miroslav Babič, Serbia

Prof. Dr. E. Diaconescu, Romania

Prof. Dr. I. Dombalov, Bulgaria

Assoc. Prof. Dr. Georgi Cholakov,
Bulgaria

Prof. Dr. G. Haidemenopoulos,
Greece

Assoc. Prof. Dr. Mikolai Kuzinovski,
FYR Macedonia

Prof. Dr. S. Mitsi, Greece

Prof. Dr. Mitko Mihovski, Bulgaria

Assoc. Prof. Dr. Fehmi Nair,
Turkey

Prof. Dr. A. Michailidis, Greece

Prof. Dr. D. Pavelescu, Romania

Prof. Dr. Alexandar Rač, Serbia

Assoc. Prof. Dr. Burhan Selcuk,
Turkey

Prof. Dr. Andrei Tudor, Romania

Prof. Dr. G. E. Zaikov, Russia

Scientific
SB **Balkan**
communications
Ltd., Co.

CONTENTS

Vol. 17, No 3, 2011

Tribotechnics and tribomechanics

- H. ADATEPE. Investigation of Effects of the Rotational Speeds on Performance of a Dynamically Loaded Journal Bearing 331

Friction

- D. STAMENKOVIC, M. MILOSEVIC, M. MIJALOVIC, M. BANIC. Estimation of the Static Friction Coefficient for Press Fit Joints 341

Tribotechnics and tribomechanics – nanofibres

- M. MOHAMMADIAN, V. MOTTAGHITALAB, A. K. HAGHI. Characterisation of Electrospun Nanofibres..... 356

Friction welding

- M. MIJALOVIC, D. MILCIC, B. ANDJELKOVIC, M. VUKICEVIC, M. BJELIC. Mathematical Model for Analytical Estimation of Generated Heat during Friction Stir Welding. Part 2 361

Wear

- L. DELEANU, G. ANDREI, L. MAFTEI, C. GEORGESCU, A. CANTARAGIU. Wear Maps for a Class of Composites with Polyamide Matrix and Micro Glass Spheres 371

Coatings

- I. PEICHEV, M. KANDEVA, E. ASSENOVA, V. POJIDAEVA. About the Deposition of Superalloys by Means of Supersonic HVOF Process 380

- M. KANDEVA, I. PEICHEV, N. KOSTOVA, K. STOICHKOV. Complex Study of Surface Layers and Coatings 387

Nanofibres

- M. MOHAMMADIAN, V. MOTTAGHITALAB, A. K. HAGHI. Ultra-fine Fibre Fabrication Via Electrospinning Process. Experimental Approach..... 394

New additives for lubricating oils

- XIONG LIPING, HE ZHONGYI, QIAN LIANG, QIU JIANWEI, FU XISHENG. Tribology Study of Cyclic-amino-containing Triazine Derivative in Rapeseed Oil 401

Lubrication – surface phenomena

- D. BEKTAS, H. KALELI. Comparison of Additive Protective Layer on the Cylinder Liner Surface using Diesel Engine and Pin-on-plate Test Rigs 411

Polymeric materials

- G. PAPAVAL, N. GELASHVILI, Z. MOLODINASHVILI, M. GURGENISHVILI, I. CHITREKASHVILI. Synthesis and Study of Phenol-formaldehyde Type Polymers on the Basis of Bisphenol with Adamantane Grouping... 426

- M. T. BASHOROV, G. V. KOZLOV, G. E. ZAIKOV, A. K. MIKITAIEV. Polymers as Natural Nanocomposites: the Reinforcement Structural Model 436

- M. T. BASHOROV, G. V. KOZLOV, G. E. ZAIKOV, A. K. MIKITAIEV. Polymers as Natural Nanocomposites: the Geometry of Intercomponent Interactions..... 442

- B. S. MASHUKOVA, T. A. BORUKAEV. Influence of Polyazomethines on Basis of 4,4'-diamino-triphenylmethane on Physicomechanical Properties of Polybutyleneterephthalate 450

Biotribology

- R. STOILOV, M. IVANOVA, K. GARBEVA, N. MARINOVA, I. MANOLOVA, ZH. KALITCHIN. Evaluation of Lubrication and Friction in Knee Joint Attacked by Osteoarthritis Treated with Ostenil, Ostenil Plus, Yaral Forte and Durolane 456

Computer simulations

- B. ROSIC, S. RADENOVIC, L. J. JANKOVIC, M. MILOJEVIC. Optimisation of Planetary Gear Train Using Multiobjective Genetic Algorithm 462

Computer control system

- M. RAVLIC, M. MATIJEVIC, B. IVKOVIC. Design of Automatic Computer Control System for the New Universal Tribometer UT-07 476

Information

- G. E. ZAIKOV, L. L. MADYUSKINA, M. I ARTSIS. 11th International Conference 'On Frontiers of Polymers and Advanced Materials' (ICFPAM) 487

COMPLEX STUDY OF SURFACE LAYERS AND COATINGS

M. KANDEVA^{a*}, I. PEICHEV^b, N. KOSTOVA^c, K. STOICHKOV^a

^a Technical University, 8 Kliment Ohridski Blvd., 1756 Sofia, Bulgaria

^b Passenger Autotransport Ltd., 29 Rishki Prohod Blvd., 9800 Shumen, Bulgaria

^c Institute of Catalysis, Bulgarian Academy of Sciences, Acad. G. Bontchev Street, Bl. 9, 1113 Sofia, Bulgaria

E-mail: kandeveva@tu-sofia.bg; iliqn_pe4ev@abv.bg

ABSTRACT

The paper presents theory and procedure for determination of the components of the communication potential η_1 , η_2 and η_3 , of their laws of variation and of the laws of linear wear for three typical situations and under 3 regimes of wear. The study is related to the first stage of the International Contract No 02/12 of scientific-technical collaboration between Romania and Bulgaria for 2010 in the topic 'Tribotechnological study and qualification of composite materials and coatings lubricated by biodegradable fluids'.

Keywords: tribology theory and procedures, wear, coatings.

AIMS AND BACKGROUND

As subject of machines mechanics, the behaviour of contact systems is described by one-parameter relationships with coefficient of proportionality between the external impact and the reactions in the joints related to friction, wear, lubrication, conductance, etc. contact processes^{1,2}. All these processes are based on contacts and contact interactions, thus the interdisciplinary science of tribology gives the central place and role to contact as a functional third body in the contact joints. This means that the contact as third body has to be presented through its individuality as complex distinct index in the law of contact interaction in general form, and, in particular, in the laws of friction, wear, etc.^{3,4}

This index is designated as communication (contact) potential η of the contact interaction in several papers of Manolov, Kandeveva, et al.⁴⁻⁷

According to the model of the functional atom, the interaction in contact joints and contact systems is described by the general law of contact interaction by the multiplication of 3 potentials: active potential λ , reactive potential δ and

* For correspondence.

communication potential η in accordance with the equation:

$$\eta\lambda\delta = 1. \quad (1)$$

The same law (1) in its differential form has the following form:

$$\frac{dR}{R} = \eta \frac{dA}{A} \quad (2)$$

where dA/A is the relative external perturbation acting on the joint; dR/R – its relative reflection; $\eta = \eta(A, R)$ – the communication potential.

In a first approximation the law in equation (2) can be presented in the form:

$$\frac{dR}{R} = \eta_3 R^{1-\eta_1} A^{\eta_2-1} \frac{dA}{A}. \quad (3)$$

So that in the general case the communication potential η is expressed by 3 indices η_3 , η_1 and η_2 .

The original item introduced by tribology in the study and qualification of contact joints is the triune non-dimensional essence of the communication potential by means of the indices η_3 , η_1 and η_2 .

The paper aims to propose a procedure for formulation of tribological laws of contact interaction during friction and wear, which take into account the triune parametric nature of the contact potential.

RESULTS AND DISCUSSION

The paper proposes theory and procedure for determination of the components of the HA communication potential η_1 , η_2 and η_3 , depending on their laws of variation and the laws of linear wear in three typical situations and three regimes of wear.

The 3 components η_3 , η_1 and η_2 of the communication potential η are non-dimensional quantities and have their own structure formed by the model of

the functional atom. Figure 1 shows the structure of the communication potential η and its components in a flat and in a three-dimensional form.

The parameter η_1 gives the reflection ability of contact, the parameter η_2 – the contact receptivity to external influence, and η_3 – the functional ability of contact as a third body in the tribosystem.

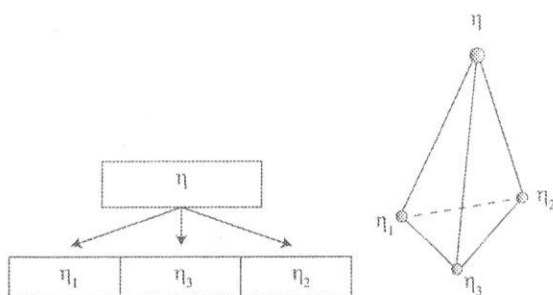


Fig. 1. Structure of the communication potential in a flat and in a three-dimensional form

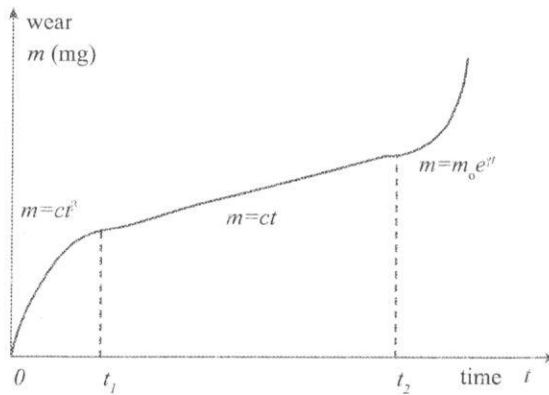


Fig. 2. Curve of the 3 wear regimes – transient, stationary and pathological

Table 1. Wear laws in dependence of the dynamic conditions of the tribosystem

Regime of wear	Transient regime $0 \leq t \leq t_1$	Stationary regime $t_1 \leq t \leq t_2$	Pathological regime $t > t_2$
Wear law	$m = ct^\beta, \beta < 1$	$m = ct$	$m = m_0 e^{\gamma t}$
Components of η	$\eta_1 = 1, \eta_2 = 1, \eta_3 = \beta$	$\eta_1 = 1, \eta_2 = 1, \eta_3 = 1$	$\eta_1 = 1, \eta_2 = 2, \eta_3 = \gamma$

Communication components of wear during run-in, stationary and pathological regimes (Fig. 2) (Ref. 7). The task is to calculate the components η_3 , η_1 and η_2 of the communication potential η for the 3 regimes of wear and to present the obtained values in the form of Table 1.

(a) Transient regime (running-in) $0 \leq t \leq t_1$

From equations

$$\frac{dm}{m} = \eta \frac{dt}{t} \text{ and } m = ct^\beta \quad (4)$$

follow

$$dm = c\beta t^{\beta-1} dt; \frac{dm}{m} = \frac{c\beta t^{\beta-1} dt}{ct^\beta} = \eta \frac{dt}{t}$$

where from the communication potential is:

$$\eta = \beta < 1. \quad (5)$$

The law of contact interaction (2) is compared with its form (3), i.e.

$$\frac{dm}{m} = \eta \frac{dt}{t} = \beta \frac{dt}{t} = \eta_3 m^{1-\eta_1} t^{\eta_2-1} \frac{dt}{t}. \quad (6)$$

For the components of η it follows:

$$\eta_3 = \beta < 1; \eta_1 = 1; \eta_2 = 1. \quad (7)$$

(b) Stationary regime $t_1 \leq t \leq t_2$

From

$$\frac{dm}{m} = \eta \frac{dt}{t} \text{ and } m = ct \quad (8)$$

we obtain

$$\frac{dm}{m} = \frac{c dt}{ct} = \eta \frac{dt}{t}$$

or

$$\eta = 1. \quad (9)$$

Comparing equation (2) with equation (3) in this case gives:

$$\frac{dm}{m} = \eta \frac{dt}{t} = 1 \frac{dt}{t} = \eta_3 m^{1-\eta_1} t^{\eta_2-1} \frac{dt}{t},$$

i.e.

$$\eta_3 = 1; \eta_1 = 1; \eta_2 = 1. \quad (10)$$

(c) Pathological regime $t > t_2$

From

$$\frac{dm}{m} = \eta \frac{dt}{t} \text{ and } m = m_0 e^{\gamma t}$$

follows

$$\frac{dm}{m} = \frac{m_0 \gamma e^{\gamma t} dt}{m_0 e^{\gamma t}} = \eta \frac{dt}{t}.$$

Hence,

$$\eta = \gamma t. \quad (11)$$

The comparison of equations (2) and (3) gives:

$$\frac{dm}{m} = \eta \frac{dt}{t} = \gamma t \frac{dt}{t} = \eta_3 m^{1-\eta_1} t^{\eta_2-1} \frac{dt}{t}$$

or

$$\gamma t = \eta_3 m^{\eta_1-1} t^{\eta_2-1}.$$

Then we can determine:

$$\eta_3 = \gamma; \eta_1 = 1; \eta_2 = 2. \quad (12)$$

Theoretical study of contact wear of rough surface layers. In the considered general case the link between rough surface layers and the basic bodies is perfect (ideal) and is characterised by the components $\eta_1 = \eta_2 = 1$. So the dynamics in the process of wear is concentrated entirely in the dynamic processes in the contact as autonomous body by means of the variation in the parameter η_3 .

If the current linear wear is designated by $h(t)$, where t is the duration of wear with fixed values of sliding velocity and nominal contact pressure, then in accor-

dance with the law of contact interaction in the form (3) we obtain:

$$\frac{dh}{h} = \eta_3 h^{\eta_1} t^{\eta_2} \frac{dt}{t}. \quad (13)$$

As in this case $\eta_1 = \eta_2 = 1$, it follows:

$$\frac{dh}{h} = \eta_3 h dt \quad (14)$$

or

$$\frac{dh}{h^2} = \eta_3 dt. \quad (15)$$

In a very short time interval $\Delta t = t_2 - t_1$ the component η_3 can be assumed as a constant, thus the integration of equation (15) in that narrow time interval leads to:

$$\int_{h_1}^{h_2} \frac{dh}{h^2} = \eta_3 \int_{t_1}^{t_2} dt \quad (16)$$

or

$$-\frac{1}{h} \Big|_{h_1}^{h_2} = \eta_3 (t_2 - t_1); -\frac{1}{h_2} + \frac{1}{h_1} = \eta_3 \Delta t,$$

i.e.

$$\eta_3 = \frac{\Delta h_i}{\Delta t_i (h_1 h_2)_i}. \quad (17)$$

The law of variation of η_3 is determined by the graphical relationship $\eta_3 = \eta_3(t)$ drawn by the experimental data according to formula (17) by means of measurement of the difference in the linear wear $\Delta h_i = h_2 - h_1$ around the current moments t_i and the corresponding wear values h_1 and h_2 in the time intervals Δt_i around these moments.

The law of variation $\eta_3 = \eta_3(t)$ is determined by the experimental procedure described in an earlier publication⁵.

The law of linear wear $h = h(t)$ is found by substitution of equation (17) in equation (16) and integration in arbitrary limits:

$$\int_{h_0}^h \frac{dh}{h^2} = \int_0^t \eta_3(t) dt \quad (18)$$

where $\eta_3(t)$ is the law of structural and functional change of contact as a third autonomous body in the regime of wear.

In the particular case

$$\eta_3 = kt \quad (19)$$

and having in view equation (18), the law of linear wear takes the following form:

$$-\frac{1}{h} \Big|_{h_0}^h = \frac{kt^2}{2}; \frac{h - h_0}{hh_0} = \frac{kt^2}{2}; h - h_0 = \frac{hh_0 kt^2}{2}.$$

Wherefrom we obtain:

$$h(t) = \frac{h_o}{\left(1 - \frac{h_o k t^2}{2}\right)}. \quad (20)$$

Theory and procedure for the abrasive wear of tribological coatings. In the particular case when the abrasive is fixed on a plastic substrate, the components of the communication potential are $\eta_1=1$; $\eta_2=1$ and $\eta_3=\eta_3(t)$, where η_1 characterises the penetration of the reactive signal in the coating; η_2 – the penetration of the active signal in the coating; and η_3 – the generative ability of the coating as separate object.

From the law of contact interaction in the form (3), where

$$\frac{dR}{R} = \frac{dh}{h} \text{ and } \frac{dA}{A} = \frac{dt}{t},$$

is obtained

$$\frac{dh}{h} = \eta_3 t \frac{dt}{t}. \quad (21)$$

Integration is done in a very short interval $\Delta t_i = (t_2 - t_1)_i$

$$\int_{h_1}^{h_2} \frac{dh}{h} = \eta_3^i \int_{t_1}^{t_2} dt; \ln \left(\frac{h_2}{h_1} \right) = \eta_3^i (t_2 - t_1)_i$$

or

$$\eta_3^i = \frac{1}{\Delta t_i} \ln \left(\frac{h_2}{h_1} \right). \quad (22)$$

The law of variation of η_3 is determined by equation (22) in different intervals Δt_i by means of the experimentally obtained results.

After finding the law $\eta_3 = \eta_3(t)$ it is substituted again in formula (21) and is integrated in arbitrary limits from 0 to t , i. e. in the general case we obtain:

$$\int_{h_o}^h \frac{dh}{h} = \int_0^t \eta_3(t) dt = \psi(t). \quad (23)$$

Let consider the particular case $\eta_3 = kt^{-\nu}$, where $\nu = \text{const} < 1$. After substitution in equation (23) and integration we have:

$$\int_{h_o}^h \frac{dh}{h} = \int_0^t kt^{-\nu} dt; \ln \frac{h}{h_o} = \frac{kt^{1-\nu}}{1-\nu}$$

i.e.

$$h(t) = h_o e^{\frac{k}{1-\nu} t^{1-\nu}}. \quad (24)$$

If we use development in the Taylor series and neglect the small quantities of second and higher order, we obtain for the law of linear wear $h=h(t)$:

$$h(t) = h_0 \left(1 + \frac{k}{1-\nu} t^{1-\nu} \right). \quad (25)$$

CONCLUSIONS

* Wear processes on fundamental level in tribology are analysed through the non-dimensional communication potential η ; they are described by the law of its variation $\eta=\eta(t)$ and the existing law of linear wear $h=h(t)$. If $\eta=\text{const}=1$, the approach and the result of wear study is purely mechanical.

* On the first essential level of tribology, contact wear is identified by the 3 components of the communication potential – η_1 , η_2 and η_3 . The values of these components are found through the selection of test conditions and the type of interaction in concrete contact joints and wear regimes.

* The paper proposes theory and procedure for determination of the components of the communication potential η_1 , η_2 and η_3 , of their laws of variation and the laws of linear wear in 3 typical situations and 3 regimes of wear.

The study in the above paper is related to the first stage of the International Contract No 02/12 of scientific-technical collaboration between Romania and Bulgaria for 2010 in the topic 'Tribotechnological study and qualification of composite materials and coatings lubricated by biodegradable fluids' supported by the fund 'Scientific Research' at the Bulgarian Ministry of Education and Science.

REFERENCES

1. N. I. KOLCHIN: Machine Mechanics. Vol. 2. Mashinostroenie, Leningrad, 1972 (in Russian).
2. V. E. KANARCHUK: Fundamentals of Machine Reliability. Naukova Dumka, Kiev, 1982 (in Russian).
3. N. MANOLOV, M. KANDEVA: Overall Tribology. Sv. Ivan Rilsky, Sofia, 2004 (in Bulgarian).
4. M. KANDEVA, E. ASSENOVA, M. MANOLOVA-DANEVA: Triboecology as Methodological Centre of Modern Science. In: Proc. of the International Conference 'ECOTRIB 2009', Pisa, Italy, 2009.
5. N. MANOLOV, M. KANDEVA: Interdisciplinary Paradigm of Tribology. Technical University – Sofia, 2010. 405 p. (in Bulgarian).
6. M. KANDEVA, N. HRISTOV, N. TONCHEV, E. ASSENOVA: Tribological Study of Cladded Bimetallic Coatings. J. of the Balkan Tribological Association, **15** (4), 455 (2009).
7. M. KANDEVA: Study of Wear of Tribological Coatings according to the Law of Contact Interaction. In: Proc. of the 7th International Conference 'BALKANTRIB'2011', Thessaloniki, Greece.

Received 9 June 2011

Revised 27 June 2011