

Union of Electronics, Electrical Engineering and Telecommunications (CEEC)
Federation of Scientific and Technical Unions
Technical Universities of Sofia, Varna and Gabrovo
State Agency for Information Technologies and Communications
University of Mining and Geology "St. Ivan Rilski"
Ruse University „Angel Kantchev"
Bourgas Free University
Houses of Science and Technology – Plovdiv, Bourgas, Varna and Montana

XVI-th International Symposium on Electrical Apparatus and Technologies

SIELA 2009



PROCEEDINGS

Volume I

**4 – 6 June 2009
Bourgas, Bulgaria**

ISBN 978-954-323-530-8

CONTENTS

<i>Nathan IDA, Sergey YUFEREV and Luca Di RIENZO</i>	USA, Finland, Italy
A systematic approach to the concept of surface impedance boundary conditions	9
<i>Plamen ANGELOV, Milena KOSTADINOVA, Dimitar BINEV</i>	Bulgaria
LED spectrum analyzer	25
<i>Plamen ANGELOV, Mihail MOMCHEDJIKOV</i>	Bulgaria
Measurement and correction of the total harmonic distortion	30
<i>Mihail ANTCHEV, Georgi KUNOV</i>	Bulgaria
Investigation of three-phase to single-phase matrix converter	37
<i>Mihail ANTCHEV, Irina ASENOVA</i>	Bulgaria
Determination of first-order input current sensitivity of bidirectional AC/DC converters	44
<i>Rumen ATANASOV</i>	Bulgaria
Strategy for the development of the European electrical engineering industry. The ELECTRA report	51
<i>Iliia CHALAKOV</i>	Bulgaria
Control tests of installation switches, socket –outlet, plugs, couplers and similar.....	57
<i>Grigore CIVIDJIAN, Alin DOLAN,</i>	
<i>Ivan YATCHEV, Krastio HINOV</i>	Romania, Bulgaria
On the tractive force of plunger-type magnet	63
<i>Silvia-Maria DIGA, Denisa RUSINARU, Cristian BRATU</i>	Romania
Design algorithm and software for longitudinal differential protection of three-phase high power transformers	71
<i>Peter DINEFF, Dilyana GOSPODINOVA</i>	Bulgaria
Electrode configuration and non-uniform dielectric barrier discharge properties	79
<i>Toni DRAGOMIROV, Nikolay GOUROV</i>	Bulgaria
Main trends on construction of on-load tap-changers with vacuum interrupters	89
<i>Toni DRAGOMIROV, Nikolay GOUROV</i>	Bulgaria
Transient dynamic responses during switch over operation of diverter switch with vacuum interrupters	94
<i>Penka GEORGIEVA</i>	Bulgaria
Distributions of financial assets characteristics	101

<i>Dinko GICHEV</i>	Bulgaria	
An algorithm for parallel inversion of block diagonal matrices over a virtual parallel machine		107
<i>Nikolay GOUROV</i>	Bulgaria	
Control of on-load tap-changers with thyristor aided diverter switches		114
<i>Stefan HADJITODOROV, Daniela OROZOVA, Evdokia SOTIROVA, Krassimir ATANASSOV</i>	Bulgaria	
Generalized net model of administrative-information processes in the Bulgarian Academy of Sciences		122
<i>Mediha Mehmed-HAMZA</i>	Bulgaria	
Sensitivity of relay protection for bus- bar coupler and bus- section coupler circuit breakers in electrical equipment 20 kV		131
<i>Mediha Mehmed-HAMZA</i>	Bulgaria	
Effectiveness of selective instantaneous overcurrent protection relays for terminals 20 kV		139
<i>Sergei IVANOV, Ivan MILENOV</i>	Bulgaria	
Some problems at the investigation of energy efficiency of three-phase induction motors.....		145
<i>Malinka IVANOVA, Dimitar KOVACHEV</i>	Bulgaria	
Finite element thermal analysis of transistor for power amplifiers		153
<i>Malinka IVANOVA, Angelina POPOVA</i>	Bulgaria	
A Web 2.0 environment utilizing for knowledge capturing		159
<i>Andon LAZAROV, Dimitar MINCHEV</i>	Bulgaria	
SAR mapping equations and coordinate transformations		165
<i>Andon LAZAROV, Dimitar MINCHEV</i>	Bulgaria	
Comparison Analysis of ESA software products and their functionality for interferometric processing		175
<i>Silvia LETSKOVSKA, Pavlik RAHNEV, Kamen SEYMENLIYSKI</i>	Bulgaria	
Using optical analyzer for student education		181
<i>Konstantin MALCHEV and Dimitar BOGDANOV</i>	Bulgaria	
Electromagnetic compatibility of the binary input circuits of digital protection relays. Paths for propagation of disturbances.....		186
<i>Konstantin MALCHEV and Dimitar BOGDANOV</i>	Bulgaria	
Evaluation of approaches for improving the electromagnetic compatibility of the binary inputs of the digital protection relays.....		193

<i>Daniela MAREVA, Dimitar YUDOV</i>	Bulgaria	
Inverter for induction heating with improved power factor correction		201
<i>Iliana MARINOVA, Valentin MATEEV</i>	Bulgaria	
Inverse design problem for electromagnetic system.....		208
<i>Mitica Iustinian NEACA , Andreea Maria NEACA</i>	Romania	
The analysis of the heating of an electrical resistor		215
<i>Evgeniya NIKOLOVA, Veselina JECHEVA</i>	Bulgaria	
An application of Dice coefficient and data mining to anomaly-based intrusion detection systems		223
<i>Mirjana PERIĆ, Mićo GAČANOVIĆ, Slavoljub ALEKSIĆ</i>	Serbia, Bosnia and Herzegovina	
Modelling of magnetic field under power lines		231
<i>Iva PETRINSKA</i>	Bulgaria	
About the efficiency of the operational regimes of lighting systems in buildings		239
<i>Diana POPOVA, Dimitar BINEV</i>	Bulgaria	
Reassessing ESP learning priorities at BFU		247
<i>Pavlik RAHNEV, Silvia LETSKOVSKA, Dimitar PARACHKEVOV</i>	Bulgaria	
Problem in using polymer substrates for solar cells		252
<i>Vladimir SHEVCHENKO</i>	Ukraine	
Current transformers with transversal magnetization		257
<i>Dimitar SOTIROV, Plamen RIZOV, Ivaylo PANAYOTOV</i>	Bulgaria	
Study on harmonics spectrum in wave form of magnetic induction in air gap and EMF of the synchronous hydrogenerators.....		262
<i>Sotir SOTIROV, Daniela OROZOVA, Evdokia SOTIROVA</i>	Bulgaria	
Generalized net model of the process of the prognosis with feedforward neural network.....		272
<i>Ivanka STAMOVA</i>	Bulgaria	
Impulsive control on the stability of neural networks with infinite delays		279
<i>Stoill STANNEV</i>	Bulgaria	
Breaking capacity of different diverter switches for on-load tap changes with vacuum interrupters		286
<i>Stoill STANNEV</i>	Bulgaria	
Simulated test scheme for switching tests of flag-cycle on-load tap changers		295
<i>Angel TOSHKOV</i>	Bulgaria	
Fiber optic distributed sensing systems for increasing metropolitan railway safety.....		304

<i>Angel TOSHKOV, Dimitar BINEV</i>	Bulgaria	
Enhancing the quality of students education by using a new method for designing optical fibers and analysis of their parameters		313
<i>Raina TZENEVA</i>	Bulgaria	
New perforation design of aluminum bolted busbar connections		320
<i>Ján VITTEK, Vladimír VAVRÚŠ,</i>		
<i>Jozef BUDAY, Jozef KUČHTA</i>	Slovakia	
Forced dynamics control of an actuator with linear PMSM		327
<i>Marinela YORDANOVA, Mediha Mehmed-HAMZA,</i>		
<i>Margreta VASILEVA</i>	Bulgaria	
Analysis of the residual current devices operation in TN system		338

ELECTRODE CONFIGURATIONS AND NON-UNIFORM DIELECTRIC BARRIER DISCHARGE PROPERTIES

Peter DINEFF, Dilyana GOSPODINOVA

Technical University of Sofia, Department of Electrical Apparatus, 1156 Sofia,
Bulgaria, E-mail: dineff_pd@abv.bg; dilianang@abv.bg

Abstract. Interesting types of AC discharges in ambient air at atmospheric pressure for the generation of non-thermal plasma at/on dielectric surfaces were investigated. *Pin-to-plane dielectric barrier discharge (PTP-DBD)* was sustained in the electrode configurations combining electrode components of both corona and DBD – metallic pins, or triangle spikes electrode, situated single- or double-in-line and metallic plate electrode covered with a dielectric barrier. It was investigated experimentally and theoretically the burning mode of a PTP-DBD in ambient air at atmospheric pressure. The PTP-DBD behavior with single- or double-in-line spikes high voltage electrode was discussed. The PTP-DBD is a new DBD-based discharge.

Keywords: burning voltage, critical parameters, dielectric barrier discharge, non-uniformity, operating area, single- and double-in-line spike electrode.

INTRODUCTION

Cold plasmas generated and maintained at atmospheric pressure (760 ± 25 Torr) and room temperature enjoyed a renaissance after the 1980s – besides thermal plasmas such as high-intensity arcs, plasma torches, and radio-frequency discharges, also this non-equilibrium plasmas are of great interest due to the increased number of its industrial applications as surface plasma and plasma-aided materials processing, [1].

From the early history of gas discharge physics it was apparent that, after ignition of the discharge, entirely different plasma states can be established in the same medium. One of representative was the hot arc discharge, approaching conditions of *local thermodynamic equilibrium (LTE)*. In short, this thermodynamic state is characterized by the property that all particle concentration are only a function of the temperature, or these plasmas are also referred to as *thermal plasmas*.

The second representative was the *non-equilibrium cold plasma* of dielectric barrier discharge (DBD) that is characterized by the property that the energy is selectively fed to the electrons leading to electron temperature that can be considerably higher than the temperature of the heavy particles T_g in plasma – neutrals and ions ($T_e \gg T_g$). This non-equilibrium, or *non-local thermodynamic equilibrium (non-LTE)*

plasma, exhibits typical plasma properties such as electrical conductivity, light (*UV*) emission and chemical activity already at moderate gas temperature, even at room temperature (*Drawin, 1971*). In extreme cases the electron temperature can reach well above 20 000 K while the gas temperature stays close the room temperature. Non-equilibrium cold *DBD* plasma has found important and far-reaching technical applications, [2].

PIN-TO-PLANE DIELECTRIC BARRIER DISCHARGES

In contrast to a glow-discharge, the *DBDs*, at low frequency (50 Hz) and atmospheric pressure, consist of a large number of bright filaments distributed in the discharge gap, so called “families” of microdischarges. These filaments are actually microdischarges that repeatedly strike at the same place as the polarity of the applied voltage changes, thus appearing as bright filaments to the observer’s eye.

Interesting types of atmospheric pressure *AC* air discharges for the generation of non-thermal plasma at/on dielectric surfaces were published recently (*Akishev et al, 2002; Radu et al, 2003*). These discharges are sustained in the electrode configuration combining the electrode elements of both: corona - metallic pins and plane, and *DBD* - metallic plate electrodes and one of them covered with a thin dielectric barrier and called *alternative current barrier corona (AC-BC)* or *pin-to-plane DBD*. The authors investigated experimentally and theoretically the burning mode of a pin-to-plane *DBDs* in ambient air and different gases at atmospheric pressure. Diverse applications demand a solid physical and chemical understanding of the operational principals of such discharges, [3].

In the following paper the overall discharge behavior of a new *DBD*-based discharge – a pin-to-plate *DBD* configuration, used to produce cold plasma was discussed with special emphasis on the influence of electrode configuration on the electrical characteristics respectively on the static (external) volt-ampere characteristics and operative areas and sub-areas.

EXPERIMENTAL INVESTIGATION

The classic low frequency *AC DBD* consists basically of two planar electrodes (sometimes co-axial or adjacent cylinder) made of two metallic plates (or tube), one of them or both covered by a dielectric materials and separated by a variable gas or air gap, Fig. 1a. The electrodes are energized by a *HV* power supply with typical voltages in the 1÷20 kV range and industrial frequency (50 Hz). The edge effect is used for establish *AC non-uniform DBD*, Fig. 1b, [3].

The classic low frequency *AC DBD* consists basically of two planar electrodes (sometimes co-axial or adjacent cylinder) made of two metallic plates (or tube), one of them or both covered by a dielectric materials and separated by a variable gas or air gap, Fig. 1a. The electrodes are energized by a high voltage power supply with typical

voltages in the 1÷20 kV range and low frequency (industrial frequency, 50 Hz). The edge effect is used for establish *AC non-uniform DBD*, Fig. 1b, [3].

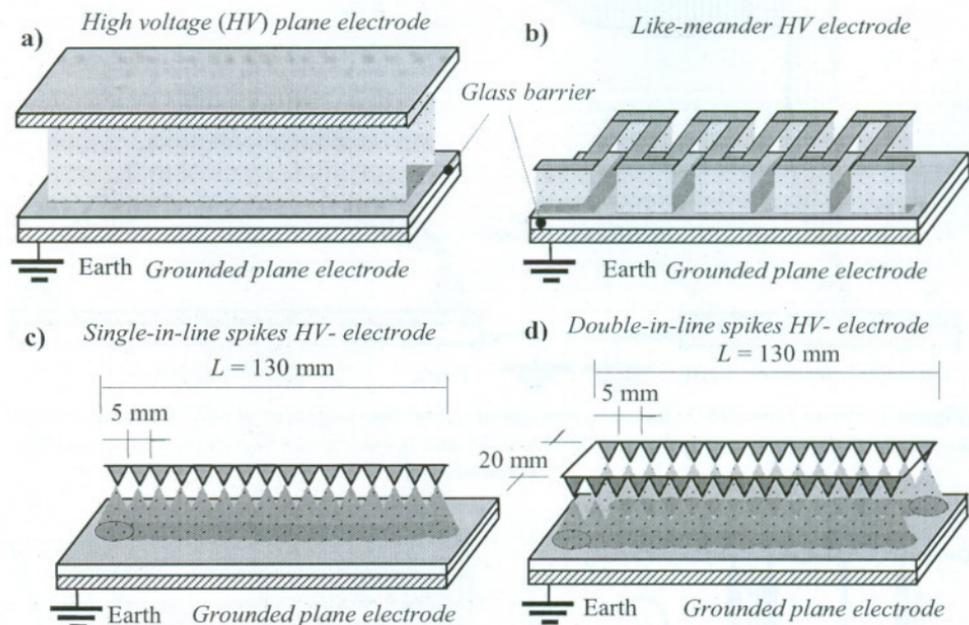


Figure 1. Electrode configurations of dielectric barrier discharge (DBD): **a** – typical *plate-to-plate* (or *co-planar*) DBD with one metallic electrode covered with a dielectric barrier; **b** – *edge effect* DBD with local non-uniformity of meander like high voltage electrode; **c** – *pin-to-plate* DBD or *AC barrier corona* with *single-in-line* spikes high voltage electrode; **d** – *pin-to-plate* DBD with *double-in-line* spikes high voltage electrode.

The *pin-to-plate* DBDs are typical discharges with expressed local non-uniformity closeness high-voltage electrode that consists a lot of spikes arranged the length of electrode according two way – *single-in-line* or *double-in-line*, Fig. 1c and d. An alumina profile is used for making the two studded high voltage electrode configurations with *single-in-line* (SIL) and *double-in-line* (DIL) arranged spikes, Fig. 2.

Electrode configuration is in position to provoke various schemas of electromagnetic interaction between microdischarges. This electrodes geometry effect (EGE) needs a change in microdischarges self-organization, and different “crystal” patterns in DBD-based discharges. It exerts strong influence on the breakdown conditions and avalanche transformation into a streamer that have to modify the DBD’s volt-ampere characteristic, ignition U_b voltage, and critical parameters of operating (oxygen and nitrogen) sub-areas, Fig. 3.

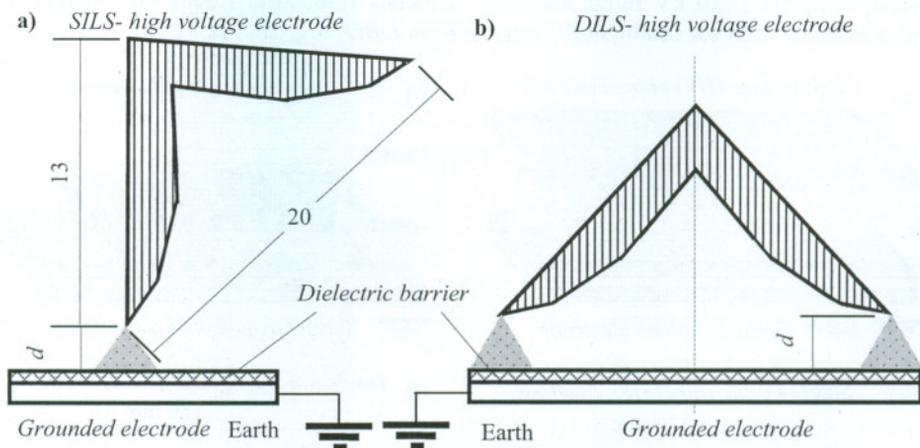


Figure 2. Pin-to-plate DBD electrode configurations set the properties of DBD-based discharge: **a** - single-in-line arranged spikes (SILS) electrode, and **b** - double-in-line arranged spikes (DILS) electrode.

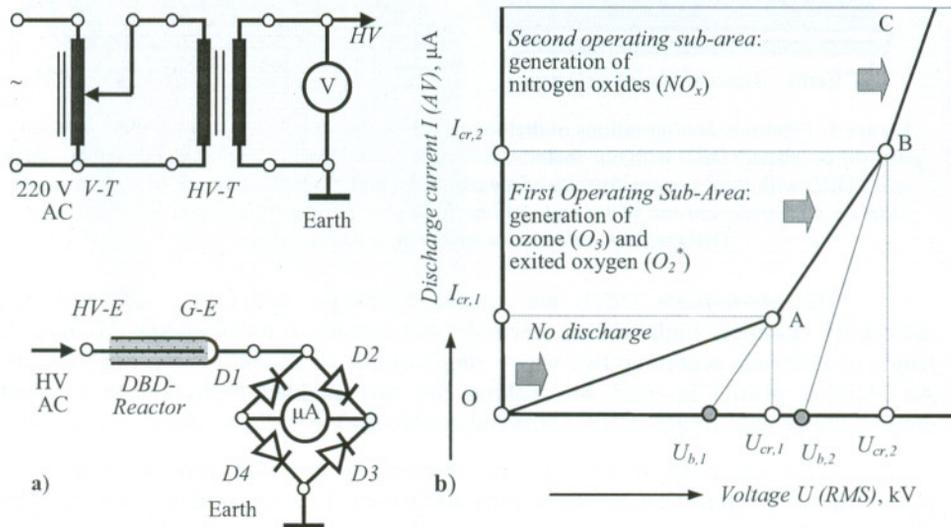


Figure 3. Dielectric barrier discharge (DBD) configuration for plotting static (external) volt-ampere characteristics – the relationship between the average of discharge currents and the RMS of voltage (a) and linear polygonal model of static volt-ampere DBD – based discharges characteristic (b).

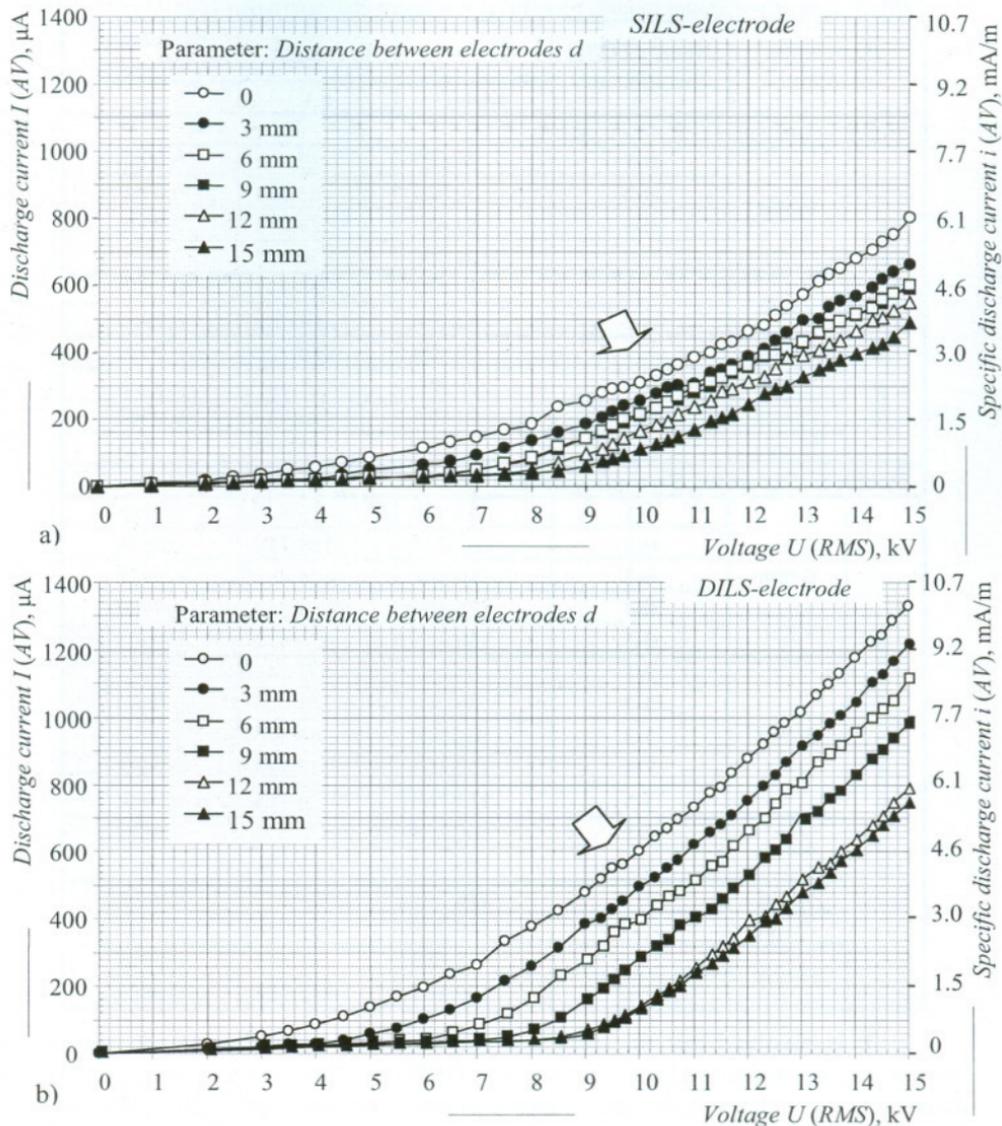


Figure 4. Families of experimental static volt-ampere characteristics of two investigated electrode configurations of pin-to-plate DBD with: **a** – single-in-line spikes (SILS-) electrode; **b** – double-in-line spikes (DILS-) electrode.

Table 1. Linear polygonal models of static volt-ampere characteristic of *pin-to-plate DBD*

Regression equations		Name of DBD operation area	Slope B	Intercept A	Correlation coefficient r
			$\mu\text{A/kV}$	μA	-
Single in line spikes electrode system					
Inter-Electrode Distance d	0 mm	0-1	21.627	-27.427	0.9980
		0-2	30.327	-65.673	0.9990
		0-3	64.657	-324.611	0.9970
		0-4	109.306	-850.093	0.9976
	3 mm	3-1	39.582	-153.993	0.9930
		3-2	83.054	-570706	0.9960
	6 mm	6-1	70.924	-488.327	0.9969
	9 mm	9-1	69.207	-462.349	0.9958
	12 mm	12-1	71.916	-545.437	0.9962
15 mm	15-1	67.277	-552.034	0.9926	
Double in line spikes electrode system					
Inter-Electrode Distance d	0 mm	0-1	35.440	-56.820	0.9988
		0-2	58.724	-154.110	0.9976
		0-3	100.848	-428.493	0.9972
		0-4	126.166	-655.852	0.9987
		0-5	150.116	-926.412	0.9996
	3 mm	3-1	38.257	-132.743	0.9973
		3-2	57.760	-245.720	0.9989
		3-3	101.219	-546.446	0.9979
		3-4	124.165	-747.338	0.9988
		3-5	151.764	-1070.114	0.9989
	6 mm	6-1	107.359	-670.693	0.9944
		6-2	145.694	-1083.791	0.9981
	9 mm	9-1	118.599	-864.872	0.9881
	12 mm	12-1	115.338	-988.288	0.9907
	15 mm	15-1	5.080	-1.673	0.9998
		15-2	109.442	-942.884	0.9889

It is involved that the local non-uniformity provoked by arranged in (one or two) line spikes will modify the *pin-to-plate DBDs* electrical external characteristic and parameters depending on the operating condition – the inter-electrode gap distance. We believe that the small gap distances will give rise to the typical influence of local non-uniformities on electrical characteristics and parameters of *pin-to-plate DBDs*.

RESULTS AND DISCUSSION

The external characteristics of *pin-to-plane DBDs* have been plotted experimentally, Fig. 3a and 4, linear polygonal discharge models, Fig. 3b, have been worked out in accordance with [2], for a minimal coefficient of linear correlation, not less than 0.9900, and then all the electrical parameters of the non-operating area, first and next *DBDs* operating areas have been calculated, Table 1.

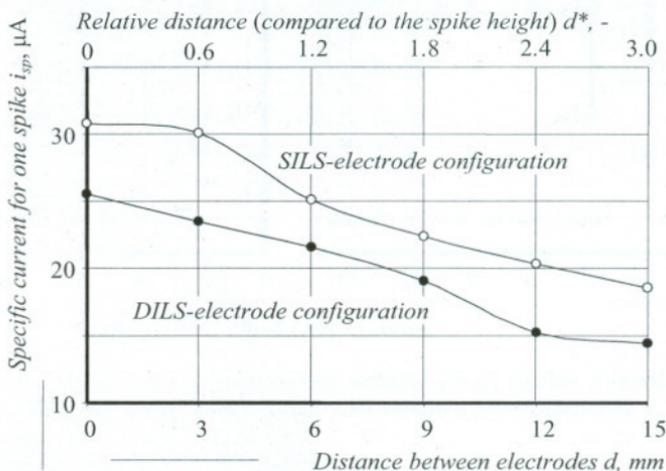


Figure 5. The specific current per spike i_{sp} depending on the distance d between the electrodes and SILS- and DILS-electrode configurations.

A specific discharge current i for unit length of electrode configuration ($\mu\text{A}/\text{m}$ or mA/m) is obtained on the base of the same length of experimental electrodes – $l = 130$ mm: $i = I/L$, mA/m . There are in a unit (1 m) electrode length 200 spikes arranged in single-in-line therefore the specific current per spike is: $i_{sp} = i/200$ or for example when $i = 1$ mA/m the specific discharge current per spike is 0.005 mA (5 μA). For SILS- *pin-to-plane DBDs*, the maximal specific current ($d = 0$; 200 spikes per one meter, on the surface of glass barrier) per spike (voltage less than 15 kV!) is $i_{sp} = 30.8$ μA , while for DILS- *pins-to-plane DBD* it is at same conditions (but 400 spikes per one meter, on the surface of glass barrier) $i_{sp} = 25.5$ μA . If there is an electrode configuration with the same number of spikes (400) but single-in-line arranged (2 meters length) then the specific current per spike will be $i_{sp} = 61.4$ μA or 17.2 % higher. The linear distance between two adjacent spikes is $l = 5$ mm, and the distance between two adjacent lines is $b = 20$ mm or $b = 4.l = 4.h$, Fig. 2a. It exist an interaction between the local spike microdischarges of adjacent lines in spite of the relatively large distances – four times the height of particular spike, for the different distances between electrodes, Fig. 6. If this examination will be applied for unit length of the electrode

configuration (per one meter) then *DILS*- configuration has its advantage: the specific discharge current is higher with more then 50 %.

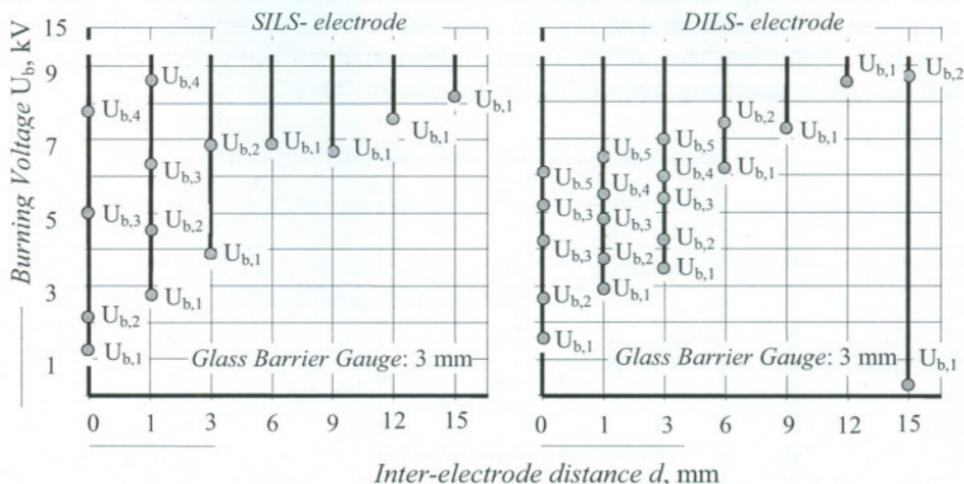


Figure 7. Burning voltage U_b for different operation areas ($U_{b,1}$, $U_{b,2}$, $U_{b,3}$, $U_{b,4}$ and $U_{b,5}$) and electrode configurations (*SILS*- and *DILS*-) of *pin-to-pin* DBD.

Ordinary the external volt-ampere characteristics of *plane-to-plane* (co-planar) DBDs are represented by polygonal linear models with tree sub-areas that correspond with the main development stages of discharges - the stage preceding the DBDs ignition, (non-operating area); and the first and the next stages of burning DBDs (operating area with its sub-areas). The external volt-ampere characteristics of *pin-to-plane* DBDs at low inter-electrode distances are represented by polygonal linear models with more then tree sub-area, Table 1.

The generalized model of burning *pin-to-plate* DBDs has the following special feature common for all DBD-based discharges: *i*) the *pin-to-plane* DBD burns at a constant burning voltage, i. e. $U_b = \text{const}$; *ii*) the ignition of *pin-to-plane* DBD or the transitions to a new operating area are threshold processes occurring for certain critical parameters - voltages and currents (U_{cr} and I_{cr}); *iii*) the *pin-to-plane* DBD have to be described by the linear relationship between the average of the discharge current and the RMS of voltage - the coefficient of linear correlation gets values over 0.9881, and above 0.9900 at low inter-electrode distances, Table 1.

The model is based on following linear equation $-I (AV) = B \cdot U (RMS) + A$, where B is the slope and A - the intercept of the geometric line.

CONCLUSIONS

As a result of the experimental investigations by the static electrical characteristics and electrical parameters of operating sub-areas performed for two electrode configurations of *pin-to-plate DBDs*, the following main conclusions can be derived:

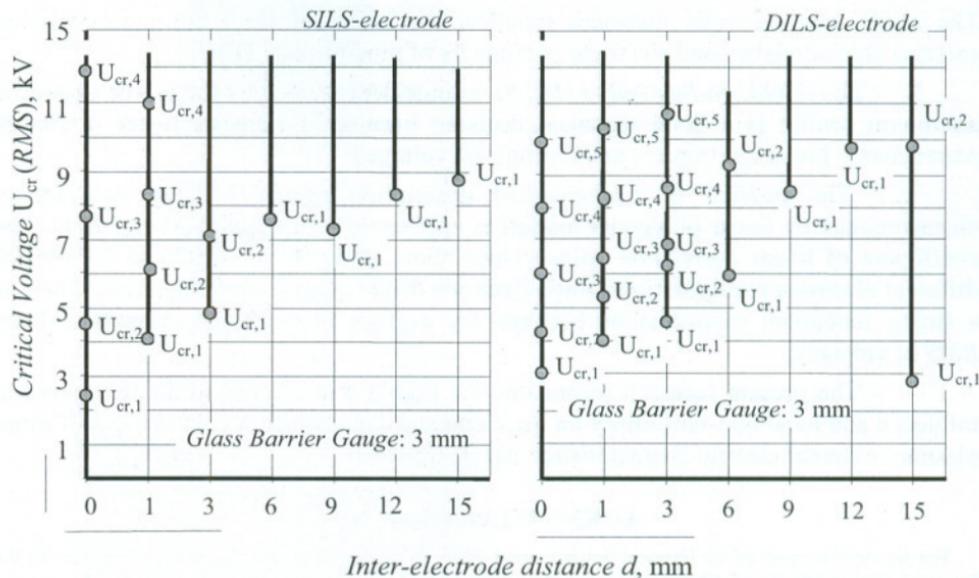


Figure 8. Ignition (or critical) voltage U_{cr} for different operation areas ($U_{cr,1}$, $U_{cr,2}$, $U_{cr,3}$, $U_{cr,4}$, and $U_{cr,5}$) and electrode configurations (*SILS*- and *DILS*-) of *pin-to-pin DBD*.- The electrode configuration effect or the influence of the local non-uniformity on *DBD*-based discharges does exist and can be successfully applied creating more effective plasma technological systems;

- The *pin-to-plane DBD*, or *AC barrier corona (AC BC)*, is a typical *DBD*-based discharge and this fact is very good shown when there are large inter-electrode distances. Then the operating area is constituted also by two operating sub-areas typical for plate-to-plate (co-planar) *DBDs*, or pseudo-uniform *DBDs*: the first or oxygen operating area generates ozone and oxygen containing cold non-equilibrium plasma, and the second or nitrogen operating area generates nitrogen oxides (NO_x) containing non-equilibrium plasma. The same elementary processes in the inter-electrode space of *pin-to-plate DBDs* are able to exist. The assumption that the *pin-to-plane DBD* is *DBD*-based discharge is fully acceptable or the described properties of *pin-to-plate DBD* are common to all *DBD*;

- The *pins-to-plate DBDs* burn in every operating sub-area at constant burning voltages U_b . This is a distinguishing feature for all the *DBDs*. That fact put also the *pins-to-plate DBDs* in the family of *DBD*-based discharges;

- The specific behaviour of *pin-to-plate DBD* is well shown at small inter-electrode distances – less then 6 mm. The operating area is constituted by more then two operating sub-areas – tree, four and five areas. That's the effect of electrode configurations that introduce a local non-uniformity nearness to high voltage electrode. The small inter-electrode distances manifest the effect of local non-uniformity on external characteristics and electrical parameters of pins-to-plate *DBD*;

- The *double-in-line spikes (DILS)* arrangement created by the use of a specific aluminum profile is a good technical decision because it suggests better discharge parameters – lower ignition U_{cr} and burning U_b voltages;

- The method of mathematical description of *DBD* static volt-ampere characteristics by linear polygonal models is applicable to the *pin-to-plate DBDs*. The coefficient of linear correlation gains values about unity: from 0.9926 to 0.9998 for different electrode configurations, inter-electrode distances and operating areas. There is a strong functional subordination between the average of discharge currents and the *RMS* of voltages;

- The present research formulates the problem of the electrode configuration influence and local non-uniformity on the elementary processes in cold non-equilibrium plasmas, external electric characteristics and parameters.

ACKNOWLEDGEMENT

The financial support of the National Science Fund, Ministry of Education and Science of Bulgaria, for the Research Project DO-02-11: EF/2009 is gratefully acknowledged.

REFERENCES

- [1] P. Dineff, D. Gospodinova. One atmosphere barrier discharges with electrode edge effect. XXXIX. International Scientific Conference on Information, Communication and Energy Systems and Technologies "ICEST 2004", Bitola, Macedonia, June 16 - 19, 2004, Proceedings of Papers, vol. 2, 2004, pp. 813÷816.
- [2] P. Dineff, D. Gospodinova. Modelling the external characteristic of cold-plasma reactors. XXXIX. International Scientific Conference on Information, Communication and Energy Systems and Technologies "ICEST 2004", Bitola, Macedonia, June 16 - 19, 2004, Proceedings of Papers, vol. 2, 2004, pp. 809÷812.
- [3] P. Dineff, D. Gospodinova and M. Shopov. Effect of electrodes geometry on technological behaviour of dielectric barrier discharge. XLIII International Scientific Conference on Information, Communication and energy systems and Technology "ICEST 2008". Nish, Serbia, 25÷27 June. Proceedings of papers, 2008, pp. 626÷629.