




Serbian Tribology Society



University of Belgrade,
Faculty of Mechanical Engineering

14th International Conference on Tribology

SERBIATRIB '15

PROCEEDINGS

Editor: Aleksandar Venci

May 13 – 15, 2015, Belgrade, Serbia

Contents

Plenary Lectures

- 1. Tribological behaviour of W-DLC against an aluminum alloy in lubricated sliding**
Sukanta Bhowmick, Anindya Banerji, Ahmet T. Alpas3
- 2. Global impact of friction on energy consumption, economy and environment**
Kenneth Holmberg, Ali Erdemir11
- 3. Polymer tribology: Current state and applications**
N.K. Myshkin, S.S. Pesetskii, A.Ya. Grigoriev17
- 4. Nanomechanical investigations of graphene by friction force microscopy**
Ernst Meyer, Shigeki Kawai, Gregor Fessler, Alexis Baratoff, Enrico Gnecco, Remy Pawlak,
Tobias Meier, Sara Freund, Antoine Hinaut, Res Jöhr, Marcin Kisiel, Urs Gysin, Thilo Glatzel24

Tribological Properties of Solid Materials

- 5. An experimental investigation and improvement of insulated rail joints**
Fathi A. Elshukri, Roger Lewis29
- 6. Experimental investigation of the friction and wear behaviour with an adapted ball-on-prism test setup**
Viktor Krasmik, Josef Schlattmann36
- 7. Experimental investigation of friction coefficient and wear rate of brass and bronze under lubrication conditions**
Salima Senhadji, Farid Belarifi, François Robbe-Valloire44
- 8. Study behavior the coefficient of friction and wear rate of the brass alloy CuZn30 on counterface material conversely**
Amir Al-Sammarraie, Dragan Milcic, Sadoon Ayed49
- 9. The investigation of friction and wear characteristic of cast iron against manganese phosphate coated and austempered compressor crankshaft**
Bariş İshak Sipcikoğlu, Burcu Yiğit, Hüseyin Oflaz, Zeynep Parlar, Vedat Temiz56
- 10. Study of stainless steels at boundary layer friction in corrosive environments**
Mara Kandeve, Galina Klitcheva62
- 11. Corrosion behavior of compocasted ZA27/SiC_p composites in sodium chloride solution**
Biljana Bobić, Ilija Bobić, Aleksandar Venc, Miroslav Babić, Slobodan Mitrović67
- 12. Nanoindentation of ZA27 alloy based nanocomposites reinforced with Al₂O₃ particles**
Dragan Džunić, Slobodan Mitrović, Miroslav Babić, Ilija Bobić, Marko Pantić, Dragan Adamović,
Branislav Nedeljković73
- 13. Optimization of wear behaviour in aluminium hybrid composites using Taguchi method**
Blaža Stojanović, Miroslav Babić, Sandra Veličković, Jasmina Blagojević81

14. Neural network based analysis of tribological behavior for an epoxy-aramid system Igor Roman, Sorin Ciortan, Iulian Gabriel Birsan	87
--	----

Surface Engineering and Coating Tribology

15. Tribological characterization of smooth and artificially textured coated surfaces using block on ring tests Anastasios Zavos, Pantelis G. Nikolakopoulos	97
16. An overview on the tribological behaviour of nitro-carburised steels for various industrial applications George Pantazopoulos, Pandora Psyllaki	106
17. Review above applying active anode protection at some dynamic petroleum equipment's in order to reduce wear Razvan George Ripeanu, Vasile Ispas, Dorina Ispas	116
18. Explanation of the wear behavior of NCD coated carbide tools facilitated by appropriate methods for assessing the coating adhesion deterioration at elevated temperatures K.-D. Bouzakis, G. Skordaris, E. Bouzakis, D. Tasoulas, P. Charalampous, S. Kombogiannis, O. Lemmer	126
19. Mechanical and tribological properties of nanolayered TiAlN/TiSiN coating Aleksandar Miletić, Pal Terek, Peter Panjan, Lazar Kovačević, Dragan Kukuruzović, Branko Škorić	137
20. Surface roughness and its effect on tribological performance of magnetron sputtered nitride coatings P. Terek, D. Kukuruzović, A. Miletić, P. Panjan, L. Kovačević, B. Škorić	143
21. Tribological and corrosion properties of nickel coating on carbon steel J. Vite-Torres, M. Vite-Torres, R. Aguilar-Osorio, J.E. Reyes-Astivia	149
22. Mechanical testing of electronic printed circuit boards and soldering alloys Alina Maria Petrescu, Georgiana Ionela Padurar, Andrei Tudor, Nicolae Alexandru Stoica	155
23. The tribological performance of hardfaced/thermal sprayed coatings for increasing the wear resistance of ventilation mill working parts Aleksandar Vencl, Boris Katavić, Danijela Marković, Marko Ristic, Bojan Gligorijević	159
24. Experimental investigation of wear resistance of models hard faced with various filler metals Dušan Arsić, Vukić Lazić, Milan Mutavdžić, Ružica Nikolić, Srbi Slav Aleksandrović, Slobodan Mitrović, Milan Đorđević	170
25. Wear-resistance study of nano-modified coatings by TIG surfacing process Plamen Tachev, Hristo Kondov, Mara Kandeve, Elisaveta Tasheva	176

Lubricants and Lubrication

26. Up-to-date tribology equipment for standard qualification of greases Alexander Minewitsch, Aleksandar Marinkovic	183
--	-----

27. The influence of degumming process on tribological behaviour of soybean oil Constantin Georgescu, Liviu Catalin Şolea, Lorena Deleanu	192
28. Physical and chemical properties of the biodegradable universal tractor oil based on the vegetable oils Sreten Peric, Bogdan Nedic, Mladen Vuruna, Mile Stoilkovic	198
29. Tribological properties of biodegradable universal tractor transmission oil Mile Stoilković, Mirjana Kolb	203
30. Analysis of HD journal bearings considering elastic deformation and non-Newtonian Rabinowitsch fluid model Juliana Javorova, Anelia Mazdrakova, Iliya Andonov, Alexandru Radulescu	209
31. Low Reynolds number non-isothermal microbearing gas flow Snezana S. Milicev, Nevena D. Stevanovic	220
32. Rheological methods for evaluation of the base oils obtained by conditioning of hydraulic used oils Alexandru Valentin Radulescu, Liana Bogatu, Irina Radulescu	225
33. Influence poly-molecular adsorption on the rheological behaviour of lubricating oil in a thin layer Igor Mukhortov, Elena Zadorozhnaya, Igor Levanov, Kseniya Pochkaylo	230
34. Influence of the metal-plating additive “Valena” on the wear of spheroidal graphite cast iron microalloyed by Sn Mara Kandeва, Boryana Ivanova, Dimitar Karastoyanov, Aleksandar Vencl, Emilia Assenova	236
35. Specifications influence on composition and tribological characteristics of industrial gears lubricants Pero Dugić, Marica Dugić	243
Tribotesting and Tribosystem Monitoring	
36. New universal tribometer as pin or ball-on-disc and reciprocating pin-on-plate types Hakan Kaleli	251
37. High temperature test device for targeted lubricant, coating and work roll material evaluation applied in hot rolling – Tribotherm Tilo Reichardt, Delphine Reche, Miriam Sartor	257
38. Static coefficient of rolling friction at high temperature Branislav Jeremic, Milan Radenkovic, Petar Todorovic, Ivan Macuzic, Marija Jeremic, Vladimir Kocovic	262
39. Elasticity and damping of AVM-2055 rubber mounting pads: Theoretical determination and experimental verification Ioannis Tsiafis, Maria Xanthopoulou, Polihronia Mamouri, Christos Tsiafis, Petar Todorovic	266
40. Effect of vibration velocity on the wear under conditions of abrasive friction Mara Kandeва, Tinka Grozdanova	272

41. The control of the lubricant film by the resistive method for scuffing	
Michaela Fomin Vasilache, Ilie Musca	279
42. Continuous, online detection of critical operating conditions and wear damage with a new oil condition monitoring system, WearSens®	
Manfred Mauntz, Ulrich Kuipers, Jörn Peuser	283
43. Reduction and maintenance of turbochargers by applying valid tribological constructing	
Vlatko Marušić, Josip Jukić, Luka Marušić, Željko Ivandić	289

Tribology of Machine Elements

44. Fretting phenomenon based reliability for design	
Milosav Ognjanović, Miloš Ristić	297
45. Static performance of surface textured magnetorheological fluid journal bearings	
Dimitrios Bompos, Pantelis Nikolakopoulos	303
46. Effect of coverage of graphite on self-lubricating plain bearings	
Nada Bojic, Dragan Milcic, Milan Banic, Miodrag Milcic	309
47. Tribological properties of self-lubricating sliding bearings made of PTFE and POM-based composite materials	
Miloš Stanković, Aleksandar Marinković	314
48. EHD contact modelling of Gleason bevel gears	
Szabolcs Szávai, Sándor Kovács	319
49. The influence of the running-in process of the gear flanks on the load distribution in simultaneously meshed tooth pairs	
Mileta Ristivojevic, Aleksandar Dimic, Predgrad Dobratic	329
50. The effect of interference on the friction torque characteristics of TPU based rotary lip seals	
Dilek Bulut, Vedat Temiz, Zeynep Parlar	336
51. Experimental research on the determination of the friction forces from dynamic seals of the hydraulic cylinders	
Corneliu Cristescu, Catalin Dumitrescu, Radu Radoi, Liliana Dumitrescu	344

Tribology of Manufacturing Processes

52. Friction conditions in tool-chip interface of orthogonal cutting with large negative rake angle	
Angelos P. Markopoulos, Nikolaos E. Karkalos, Nikolaos M. Vaxevanidis, Dimitrios E. Manolakos	355
53. Considerations on the impact of cutting parameters selection on the wearing of cutting tools made of syntherized metallic carbides	
Ion Nae, Gabriela Cristina Ionescu, Octavian Narcis Ionescu	361

54. New trends in cutting technologies: Application of high pressure jet assisted machining Branislav Sredanović, Gordana Globočki-Lakić, Davorin Kramar, Janez Kopač	367
55. Experimental study of adhesive wear of a holding device using a cross cylinders tester M. Vite-Torres, E.A. Gallardo-Hernández, E. Cruz-Ovando	376
56. Characteristics and limitations of physical tribo-modelling in deep drawing of thin sheet metal Milentije Stefanović, Dragan Adamović, Zvonko Gulišija, Srbislav Aleksandrović, Milija Kraišnik, Vesna Mandić	382
57. The compliance and load capacity of contacts based on friction Vladimir Kočović, Marija Jeremić, Petar Todorović, Branko Tadić, Djordje Vukelić	388
58. Influence of lubricant type on the surface quality of aluminium parts obtained by ironing Dragan Adamović, Milentije Stefanović, Miroslav Živković, Slobodan Mitrović, Jelena Živković, Fatima Živić	397
59. Two-phase ironing process in conditions of ecologic and classic lubricants application Milan Djordjevic, Srbislav Aleksandrovic, Vukic Lazic, Dusan Arsic, Milentije Stefanovic, Dragan Milosavljevic	407

Design and Calculation of Tribocontacts

60. Effect of surface roughness on the thermoelastic behavior of friction clutches Oday I. Abdullah, Josef Schlattmann, Michael Lytkin	417
61. A numerical model for mechanical interaction of rough surfaces of the “piston-cylinder liner” tribosystem Yurii Goritskiy, Yuliya Ismailova, Konstantin Gavrilov, Yurii Rozhdestvensky, Aleksei Doikin	427
62. Methods of assessing the resource bearing crankshaft of internal combustion engine based on the calculation of hydro-mechanical characteristics I.G. Levanov, E.A. Zadorozhnaya, A.L. Dudnikov	432
63. A study the axial and radial rotor stability of the turbo-machinery with allowance the geometry of the surface and properties of the lubricating fluid Elena Zadorozhnaya, Sergey Cherneyko, Maksim Kurochkin, Dmitriy Sorokin	438
64. The influence of friction coefficient on a stress and strain distribution on block-on-ring FEM model Mihail Botan, Doina Boazu, Constantin Georgescu, Lorena Deleanu	446
65. Computer simulation of continuous SPD processing of commercially pure titanium using a virtual full factorial experiment with account of the influence of friction factors V.I. Semenov, S.-J. Huang, L.Sh. Shuster, V.G. Shibakov, A.G. Raab	454
66. Modelling of nonlinear dynamic of mechanic systems with the force tribological interaction Victor Musalimov, Konstantin Nuzhdin, Irina Kalapyshina	460
67. Physical and mathematical modeling of tribosystem “working tool – land” Konstantin Borak	468

Biotribology / Nano and Microtribology

- 68. Influence of the biomaterial porosity on the host tissue response, the friction and adhesion**
Fatima Zivic, Nenad Grujovic, Slobodan Mitrovic, Dragan Adamović, Vojislav Petrovic,
Luka Bukvic, Andreja Radovanovic475
- 69. Sliding friction and wear performance of the nano-bioceramic α -Al₂O₃ prepared by high energy milling**
Mamoun Fellah485
- 70. Tribology in micromechatronic devices**
Jelena Manojlović, Andrija Milojević, Miša Tomić, Vukašin Pavlović, Miloš Milošević499
- 71. Estimation of triboresistance of erythrocytes during surface scanning with the use of atomic force microscopy**
Victor M. Musalimov, Pavel P. Kovalenko, Svetlana Yu. Perepelkina509
- 72. AFM surface roughness and topography analysis of lithium disilicate glass ceramic**
Marko Pantić, Slobodan Mitrović, Miroslav Babić, Danimir Jevremović, Dragan Džunić,
Fatima Živić, Dragan Adamović514
- 73. Some aspects concerning the behaviour of friction materials at low and very low sliding speeds**
Nicolae Alexandru Stoica, Andrei Tudor522
- Other Topics Related to Tribology**
- 74. Sources for future energy carriers: Water energy – tribological aspects**
Wilfried J. Bartz531
- 75. Research on tribology phenomena in every day life**
Dušan Stamenković, Milan Nikolić, Ljubislav Vasin, Milan Banić, Aleksandar Miltenović535
- 76. Tribology in human walking**
Milan Nikolić, Dušan Stamenković, Miloš Milošević, Milan Banić543
- 77. The role of self-organization and selective transfer in frictional coatings formation**
Emilia Assenova549
- 78. The effect of static friction about loading of Coulombian dampers**
Narcis Cerbu, Andrei Tudor, Nicolae Stoica, Alina Maria Petrescu558
- 79. Energy balance of friction and friction coefficient in energetical interpretation**
Sergey V. Fedorov563
- 80. Trigger of coupled singularities in vibrations of the system with Coulomb's type frictions**
Katica R. (Stevanović) Hedrih572
- 81. Research on tribology in Southeastern Europe: A bibliometric study**
Nikolaos M. Vaxevanidis, Aleksandar Vencel, Pandora Psyllaki583

Trenje, habanje i podmazivanje

82. Tribološke karakteristike galvanskih prevlaka cinka

Desimir Jovanović, Bogdan Nedić, Goran Rozing599

83. Istraživanje triboloških karakteristika različitih ulja primenjenih u tribomehaničkom sistemu

Pavel Kovač, Dušan Ješić, Nikola Gvozdenović, Marin Gostimirović, Vladimir Pucovsky605

Authors Index611



Serbian Tribology
Society

SERBIATRIB '15

14th International Conference on
Tribology



University of Belgrade,
Faculty of Mechanical Engineering

Belgrade, Serbia, 13 – 15 May 2015

WEAR-RESISTANCE STUDY OF NANO-MODIFIED COATINGS BY TIG SURFACING PROCESS

Plamen TACHEV¹, Hristo KONDOV¹, Mara KANDEVA^{2,*}, Elisaveta TASHEVA³

¹Institute of Metal Science, Equipment and Technology with Hydro- and Aerodynamic Center – BAS, Bulgaria

²Tribology Center, Technical University – Sofia, Bulgaria

³Higher School of Transport Todor Kableshkov – Sofia, Bulgaria

*Corresponding author: kandevam@gmail.com

Abstract: A series of cored wires for TIG (tungsten inert gas) surfacing have been designed and elaborated, which contain various content types of nano-modifiers in various percentage content. Nano-modified coatings were deposited through weld overlay on samples of construction steel. The investigation reveals the influence of various nano-modifiers on the wear-resistance of weld overlay coatings.

Keywords: wear resistance, nano-materials, TIG welding, surfacing, cored wire.

1. INTRODUCTION

Amid the global economic crisis, the necessity for a more efficient use of materials is particularly relevant. In response, the authors are searching for new applications of the latest scientific achievements. One of the directions, in which some researchers focus their efforts, is the application of nanotechnologies to obtain metals and alloys with improved performance characteristics.

The addition of small amounts of highly heat-resistant nanopowders to traditional metals and alloys reveals opportunities to improve their performance and expands their area of application.

The materials thus obtained are known as metal matrix nano-composites (MMNCs) [1]. A number of studies deal with the effect of titanium-containing nanopowders on the characteristics of the metal after weld

overlay. In most cases, the materials used are titanium carbonitride [2], and silicon carbide [3]. It is found that the increased amount of titanium-containing inclusions changes the microstructure of the metal and its mechanical properties (hardness, wear resistance) are improved. Good results are obtained when nano-modifier additives are introduced during the processes of casting [4], or welding [5-7]. The improved properties, such as increased hardness and considerable strength, are probably due to the finer grain structure and the redistribution of internal stresses in result of the addition of nano-modifiers. For this purpose, the nano-powders usually used have size of several tens of nanometers [8]. The mechanical properties of the weld overlay metal coating are maximally improved at medium concentration levels of nano-modifiers [9-13].

2. TECHNOLOGY FOR MANUFACTURE OF NANO-MODIFIED CORED WIRES FOR TIG WELD OVERLAY

Two types of nano-modified cored wires for TIG welding are developed made of steel tubes with dimensions $\varnothing 2.5$ mm and length 400 mm, which are filled with powder mixture. The filling of the first group of wires has soft matrix of iron powder modified with nano-sized powders of TiN, SiC, and TiCN. The second group has pre-stressed matrix of powdered Astalloy (Fe + 3 % Cr + 0.5 % Mo) and nano-sized powder of Al_2O_3 added in different percentage.

For better moistening and assimilation, the nano-sized powders used were activated in a vibratory mill.

The tubes were cut to the required size and degreased. The weight of each tube was measured using analytical balance "Metler" with accuracy to ten-thousandths of gram, both prior to and after filling with the powder mixture. The tubes were filled through vibration upon the scheme shown in Figure 1. The ready cored wires were labelled for identification (Fig. 2).



Figure 1. Vibration filling of cored wires



Figure 2. Ready cored wires

Table 1 shows the content of the two groups of cored wires used for weld overlay of test sample plates.

Table 1. Content of cored wires

Group	No	Content of the cored wire
I	1	Fe
	2	Fe + 1.5 % TiN
	3	Fe + 1.5 % SiC
	4	Fe + 1.5 % TiCN
II	5	1 % Al_2O_3 + Astalloy
	6	2 % Al_2O_3 + Astalloy
	8	3 % Al_2O_3 + Astalloy

3. WELD OVERLAY OF TEST SAMPLES

The weld overlay coating was deposited using inverter welding machine Stel 161N with welding current 80A.

The welds are longitudinal and each weld overlaps two thirds of the previous one. The welding speed is 3.6 m/h and each stroke is paused for about 10 s before welding the next one. The weld overlay coating is deposited in three layers. Prior to deposition of each layer, the surface is cleaned with wire brush.

The sample plates for weld overlay are made of steel 235 JR with dimensions $125 \times 60 \times 4$ mm (Fig. 3). The surface of the plates is cleaned by grinding.



Figure 3. Plates prepared for weld overlay of coatings

4. TESTING OF WELD OVERLAY COATINGS FOR WEAR RESISTANCE

The coatings deposited through weld overlay are tested and assessed for wear resistance using the own original methodology of the authors [14,15]. It consists in measuring of the mass wear of samples during a number of abrasive wear cycles and calculation of the intensity of wear and the wear resistance for the travelled path of abrasion. The comparison upon the parameter wear resistance is carried out at constant testing conditions.

The methodology of testing for wear resistance is based on measurement of the total loss of mass of the tested sample under precisely fixed parameters of abrasion: normal loading, speed of sliding, contact surface, friction path, type, size and hardness of abrasive particles. The measured mass wear is the base for estimation of the characteristics of wear, i.e. speed of mass wear, intensity of mass wear, and wear resistance.

The test samples are square plates with a side of 15 mm. The samples are cut through water-jet cutting to avoid the effect of heating. The methodology is realized through tribotester [16].

In Figure 4 is shown graphically the dependence of the wear on the number of cycles of abrasion and the mass wear of coatings deposited through TIG weld overlay using with nano-modified cored wire of the group I (Table 1).

The diagram in Figure 5 illustrates the wear resistance of weld overlay coatings.

It is obvious that the results obtained using cored wires from the group I are very close to each other, as the best wear resistance is achieved in coatings deposited using cored wires containing Fe + 1.5 % SiC. Here the addition of nano-sized powders has only a slight effect on the wear resistance.

In Figure 6 is shown graphically the relation between the number of cycles of abrasion and the wear of coatings deposited through weld overlay with cored wires from group II, and Figure 7 displays graphically the wear resistance of those coatings.

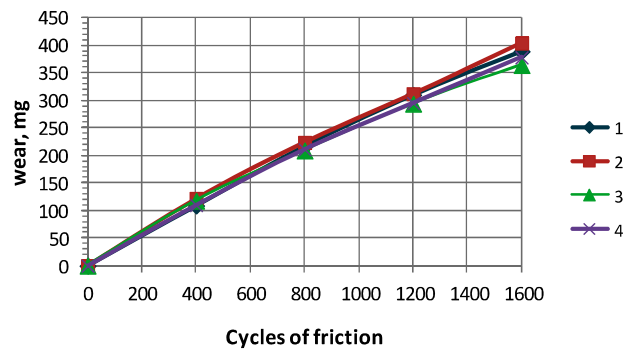


Figure 4. Dependence of the wear on the number of abrasion cycles of coatings deposited using cored wire of the group I

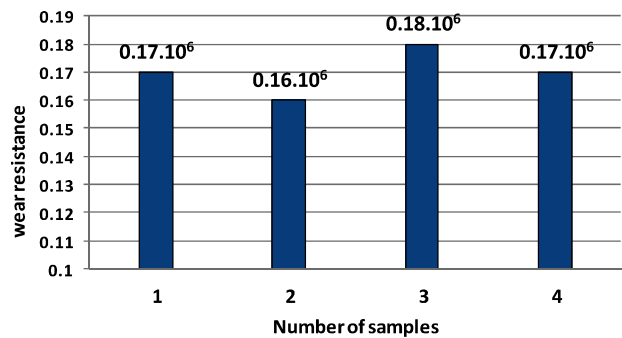


Figure 5. Wear resistance of coatings deposited using cored wire of the group I

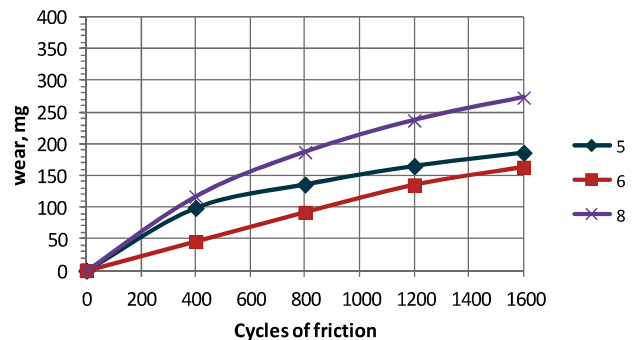


Figure 6. Dependence of the wear on the number of cycles of abrasion for coatings deposited using cored wires of the group II

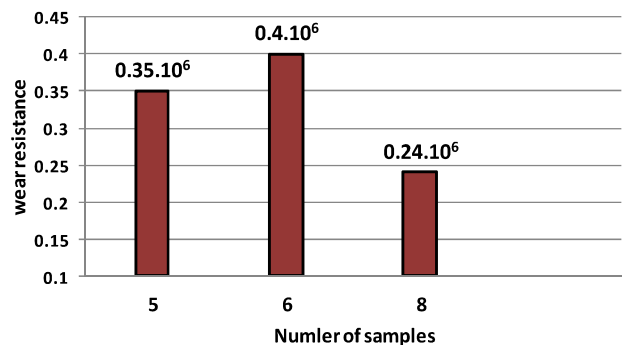


Figure 7. Wear resistance of coatings deposited using cored wires of the group II

Obviously, the best wear resistance is achieved in the coating deposited using cored

wire with Astalloy matrix and nano-modifier of 2 % Al₂O₃.

5. DISCUSSION

1. Developed is an innovative technology for manufacture of nano-modified cored wires for TIG welding.
2. The addition of nano-sized powders to “soft” matrix of carbonyl iron has an insignificant effect on the wear resistance of coatings deposited through weld overlay.
3. The coatings deposited through cored wire weld overlay with “pre-stressed” matrix of Astalloy display considerable change of wear resistance depending on the quantity of nano-modifier added.

6. CONCLUSIONS

The experiments for manufacture of cored wires modified with nano-powders and the testing of coatings deposited through TIG weld overlay for wear resistance prove that the most promising results are achieved when using “pre-stressed” matrices, i.e. such with higher initial hardness, that are considerably influenced by the added nano-modifiers.

The highest wear resistance is achieved in the coating deposited through weld overlay using cored wire with Astalloy matrix and 2 % Al₂O₃ as nano-modifier.

The obtained results are a good basis for further research on selection of new combinations of pre-stressed matrices and nano-modifiers.

REFERENCES

- [1] J.-J. Park, S.-M. Hong: Microstructure and properties of SA106B carbon steel after treatment of the melt with nano-sized TiC particles, *Materials Science and Engineering A*, Vol. 613, pp. 217-223, 2014.
- [2] A. Artemev, G.N. Sokolov, V.I. Lysak: Effect of microparticles of titanium diboride and nanoparticles of titanium carbonitride on the structure and properties of deposited metal, *Metal Science and Heat Treatment*, Vol. 53, No. 11-12, 2012.
- [3] R. Jamaati, M.R. Toroghinejad, H. Edris: Effect of SiC nanoparticles on bond strength of cold roll bonded IF steel, *Journal of Materials Engineering and Performance*, DOI: 10.1007/s11665-013-0650-8.
- [4] Y. Yang, J. Lan, X. Li: Study on bulk aluminum matrix nano-composite fabricated by ultrasonic dispersion of nano-sized SiC particles in molten aluminum alloy, *Materials Science and Engineering A*, Vol. 380, pp. 378-383, 2004.
- [5] А.С. Трошков: Модифицирование структуры наплавленного металла нанодисперсными карбидами вольфрама, *Ползуновский альманах*, No. 2, 2009.
- [6] В.О. Дроздов, А.Г. Маликов и др.: Экспериментальное исследование лазерной сварки металлов с применением нанопорошковых добавок, *Докл. V Всероссийской конф. „Взаимодействие высококонцентрированных потоков энергии с материалами в перспективных технологиях и медицине”*, 26-29.03.2013, Новосибирск, pp. 97-101.
- [7] П. Ташев, Т. Петров, Я. Лукарски, Г. Стефанов: Технологии за внасяне на наноразмерни частици в заваръчния шев при процеси на наваряване, *Инженерни науки*, No. 3, pp. 82-93, 2013.
- [8] А.Н. Черепанов и др.: О применении нанопорошков тугоплавких соединений при сварке и обработке металлов и сплавов, *Тяжелое машиностроение*, No. 4/2, pp. 25-26, 2008.
- [9] M. Fattahi, N. Nabhani, M.R. Vaezi, E. Rahimi: Improvement of impact toughness of AWS E6010 weld metal by adding TiO₂ nanoparticles to the electrode coating, *Materials Science and Engineering A*, Vol. 528, pp. 8031-8039, 2011.
- [10] A.M. Paniagua-Mercado, V.M. Lopez-Hirata, H.J. Dorantes-Rosales et al.: Effect of TiO₂-containing fluxes on the mechanical properties and microstructure in submerged-arc weld steels, *Materials Characterization*, Vol. 60, pp. 36-39, 2009.
- [11] B. Beidokhti, A.H. Koukabi, A. Dolati: Effect of titanium addition on the microstructure and inclusion formation in submerged arc welded HSLA pipeline steel, *Journal of Materials Processing Technology*, Vol. 209, pp. 4027-4035, 2009.

- [12] P. Tashev, M. Kandeve, P. Petrov: An investigation on the wear properties of carbon steel coated with nanoparticles using electron beam technique, *Journal of the Balkan Tribological Association*, Vol. 20, No. 2, pp. 227-234, 2014.
- [13] C. Cuixin, P. Huifen, L. Ran et al.: Research on inclusions in low alloy steel welds with nano alumina addition, *Journal of Computational and Theoretical Nanoscience*, Vol. 9, No. 9, pp. 1533-1536, 2012.
- [14] M. Kandeve, B. Ivanova: Abrasive wear and wear-resistance of high strength cast iron containing Sn microalloy, *International Journal of The Balkan Tribological Association*, Vol. 4, No. 4, pp. 559-547, 2013.
- [15] I. Peichev, M. Kandeve, E. Assenova, V. Pojidaeva: About the deposition of superalloys by means of supersonic HVOF process, *Journal of the Balkan Tribological Association*, Vol. 17, No. 3, pp. 380-386, 2011.
- [16] V. Petkov, P. Tashev, N. Gidikova, M.Kandeve, R.Valov: Wear resistant chromium coating with diamond nanoparticles upon an arc deposited layer, *Journal of the Balkan Tribological Association*, Vol. 21, No. 1, pp. 134-140, 2015.